




MUNRO UNIVERSAL FLANGE ADAPTER

Universal Flange Adapter M7170L

This all-in-one universal flange adapter accepts ANSI 125/150, PN10, PN16, JIS, 10K and BS-10E flange patterns. In addition, a longer grooved end makes this unique fitting easier to install. Pressure ratings conform to the pressure rating of the installed coupling.

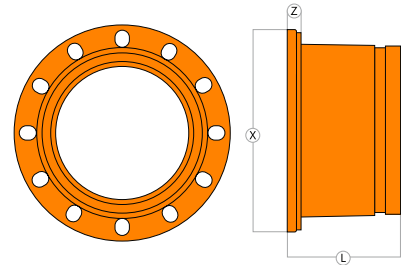

TECHNICAL DATA

Composition Ductile iron, non-lead orange rust-inhibiting paint coating, ASTM A536, Grade 65-45-12

| Nominal Size | Pipe OD | ANSI 125/150 | PN 10/16 | JIS 10K | BS 10E | Dimensions | | | Bolts | | Approx. Weight | Model Number |
|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|--------------|-------|------------|----------------|--------------|
| | | | | | | L | X | Z | Qty | Size | | |
| in/mm | in/mm | in/mm | in/mm | in/mm | in/mm | in/mm | in/mm | in/mm | in/mm | lb/kg | | |
| 8 200 | 8.625 219 | 11.75 298 | 11.60 295 | 11.40 290 | 11.50 292 | 6.00 152 | 13.5 343 | 0.50 12.7 | 8/12 | 3/4 M20 | 26 12 | M7170X8 |
| 10 254 | 10.75 273 | 14.25 362 | 13.75 350 | 14.00 355 | 14.00 356 | 6.00 152 | 16.00 406 | 0.80 20.3 | 12 | 7/8 M22 | 40 18 | M7170X10 |
| 12 300 | 12.75 324 | 17.00 432 | 16.15 410 | 15.75 400 | 16.00 406 | 6.00 152 | 19.00 465 | 1.00 25.4 | 12 | 7/8 M22 | 57 26 | M7170X12 |