




F4-OFS

ORFS Female Swivel

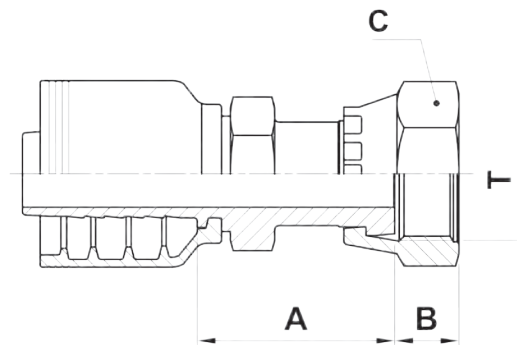

USE WITH TEXCEL HOSE SERIES

HS3K, HS4K, HS5K (TO SIZE 20), HS5K-XT, HS6K (TO SIZE 16), HBR1 (SIZES 12 TO 32), HBR2 (SIZES 12 TO 32), HB3K-12 & 16, HB4K-12

ONE-PIECE NO-SKIVE FITTING

| CODE | HOSE | | | THREAD SIZE | A | | B | | E | | C | | | Box Qty | |
|-------------|------|------|----|--------------|------|------|------|------|------|--------|------|------|--------|---------|------|
| | SIZE | INCH | DN | | [in] | [mm] | [in] | [mm] | [in] | ↻[in] | [mm] | [in] | ↻[in] | | [mm] |
| F4-0808-OFS | 08 | ½ | 12 | 1 3/16" - 16 | 1.45 | 37.0 | 0.43 | 11.0 | 0.75 | 3/4 | 19.0 | 0.95 | 1 5/16 | 24.0 | 40 |
| F4-0810-OFS | 08 | ½ | 12 | 1" - 14 | 1.56 | 39.7 | 0.53 | 13.5 | 0.95 | 1 5/16 | 24.0 | 1.18 | 1 3/16 | 30.0 | 30 |
| F4-0812-OFS | 08 | ½ | 12 | 1 3/16" - 12 | 1.76 | 44.7 | 0.57 | 14.5 | 1.18 | 1 3/16 | 30.0 | 1.42 | 1 7/16 | 36.0 | 20 |
| F4-1010-OFS | 10 | 5/8 | 16 | 1" - 14 | 1.54 | 39.1 | 0.53 | 13.5 | 0.95 | 1 5/16 | 24.0 | 1.18 | 1 3/16 | 30.0 | 25 |
| F4-1012-OFS | 10 | 5/8 | 16 | 1 3/16" - 12 | 1.73 | 44.0 | 0.57 | 14.5 | 1.18 | 1 3/16 | 30.0 | 1.42 | 1 7/16 | 36.0 | 20 |
| F4-1210-OFS | 12 | ¾ | 19 | 1" - 14 | 1.71 | 43.5 | 0.53 | 13.5 | 1.01 | 1 1/16 | 27.0 | 1.18 | 1 3/16 | 30.0 | 20 |
| F4-1212-OFS | 12 | ¾ | 19 | 1 3/16" - 12 | 1.75 | 44.5 | 0.57 | 14.5 | 1.18 | 1 3/16 | 30.0 | 1.42 | 1 7/16 | 36.0 | 15 |
| F4-1216-OFS | 12 | ¾ | 19 | 1 7/16" - 12 | 2.03 | 51.5 | 0.58 | 14.8 | 1.42 | 1 7/16 | 36.0 | 1.61 | 1 5/8 | 41.0 | 15 |
| F4-1612-OFS | 16 | 1 | 25 | 1 3/16" - 12 | 2.01 | 51.0 | 0.57 | 14.5 | 1.42 | 1 7/16 | 36.0 | 1.42 | 1 7/16 | 36.0 | 10 |
| F4-1616-OFS | 16 | 1 | 25 | 1 7/16" - 12 | 2.09 | 53.0 | 0.58 | 14.8 | 1.42 | 1 7/16 | 36.0 | 1.61 | 1 5/8 | 41.0 | 10 |
| F4-1620-OFS | 16 | 1 | 25 | 1 1/16" - 12 | 2.17 | 55.0 | 0.58 | 14.8 | 1.61 | 1 5/8 | 41.0 | 1.97 | 2 | 50.0 | 8 |
| F4-2020-OFS | 20 | 1 ¼ | 31 | 1 1/16" - 12 | 2.32 | 59.0 | 0.58 | 14.8 | 1.61 | 1 5/8 | 41.0 | 1.97 | 2 | 50.0 | 6 |
| F4-2024-OFS | 20 | 1 ¼ | 31 | 2" - 12 | 2.48 | 63.1 | 0.58 | 14.8 | 1.97 | 2 | 50.0 | 2.36 | 2 3/8 | 60.0 | 5 |
| F4-2424-OFS | 24 | 1 ½ | 38 | 2" - 12 | 2.41 | 61.2 | 0.58 | 14.8 | 1.97 | 2 | 50.0 | 2.36 | 2 3/8 | 60.0 | 4 |