


TEX-FKM

Fluoroelastomer Type A Sheet

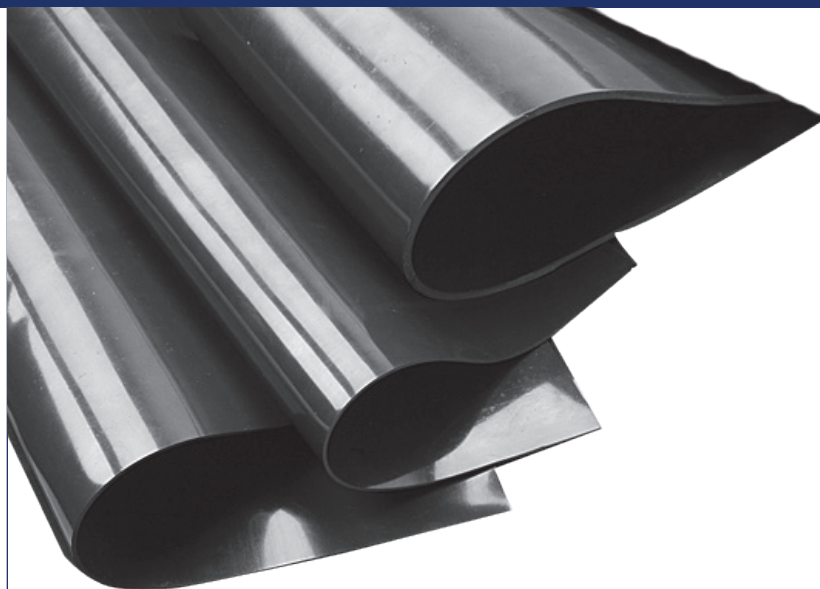

General Properties and Applications

Premium-grade fluoroelastomer sheet, Type A (66%+ fluorine) for the most demanding applications. Tex-FKM is used in applications requiring outstanding resistance to heat and/or chemical solutions. Fluorocarbon-elastomer Type A exhibits low compression set, but is not resistant to flex fuels containing high levels of alcohol or MTBE (reformulated gasoline/oxygenated).








Note:

- Sold by the full roll or the linear yard.

TECHNICAL DATA

| | |
|------------------|------------------------------------|
| Durometer | 75 +/-5 |
| Color | Black, smooth and cinnamon-scented |
| Temperature | -20°F to +450°F |
| Tensile Strength | 1,000 psi |
| Elongation | 225% |



|  Width |  Gauge |  Part Number |  Ln. Ft./Roll |  Ln. Yds./Roll |  Sq. Yds./Roll |  Lbs./Roll |
|---|---|---|--|--|---|---|
| 48" | 1/16" | FKM-2 | 51' | 17 | 22.67 | 124 |
| | 1/8" | FKM-4 | 51' | 17 | 22.67 | 247 |
| | 3/16" | FKM-6 | 51' | 17 | 22.67 | 371 |
| | 1/4" | FKM-8 | 51' | 17 | 22.67 | 494 |
| | 3/8" | FKM-12 | 27' | 9 | 12 | 371 |
| | 1/2" | FKM-16 | 27' | 9 | 12 | 494 |