


TEX-KING



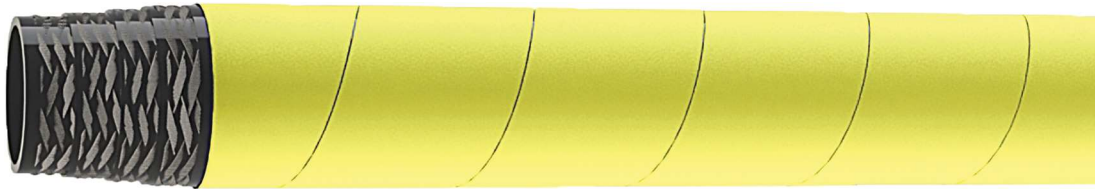


Wire Air Hose

The ideal "bull hose" for heavy construction, mining and road-building service. Braided steel wire construction.



TECHNICAL DATA

Tube	Black, Nitrile/SBR blend	
Cover	Bright yellow, SBR blend (Pinpricked)	
Reinforcement	Steel braided wire plies	
Safety Factor	4:1	
Temperature	-22°F to +185°F, intermittent at 250°F	
Branding	TEXCEL® TEX-KING - STEEL WIRE AIR HOSE -<ID>- XXXPSI MAX WP(embossed)	

 I.D.	# Part Number	 O.D.	 Std. Length	 Working Pressure (psi)	 Lbs./Ft.
1/2"	KING-.50	57/64"	100'	1000	0.31
3/4"	KING-.75	1-9/64"	100'	1000	0.44
1"	KING-1.0	1-27/64"	100'	800	0.61
1-1/2"	KING-1.5	1-62/64"	100'	800	1.07
2"	KING-2.0	2-33/64"	100'	600	1.44
2-1/2"	KING-2.5	3-5/64"	100'	600	1.41
3"	KING-3.0	3-40/64"	100'	500	2.19
4"	KING-4.0	4-51/64"	100'	500	4.55