



Ahead Of The Curve.

TEX-SEAL


Compressed Non-Asbestos Sheet

General Properties and Applications

SEAL BLUE and GREEN 6010 meet and exceed industry standards for general purpose compressed sheet. Excellent gasket material with good chemical resistance. Known for its good dynamic resistance and outstanding sealability. Recommended for applications with oils, gasoline, mild chemicals, water and other fluids.

Note:

- All Tex-SEAL items are manufactured in a Registered ISO-9001 facility under rigorous quality controls, and provide full product traceability.

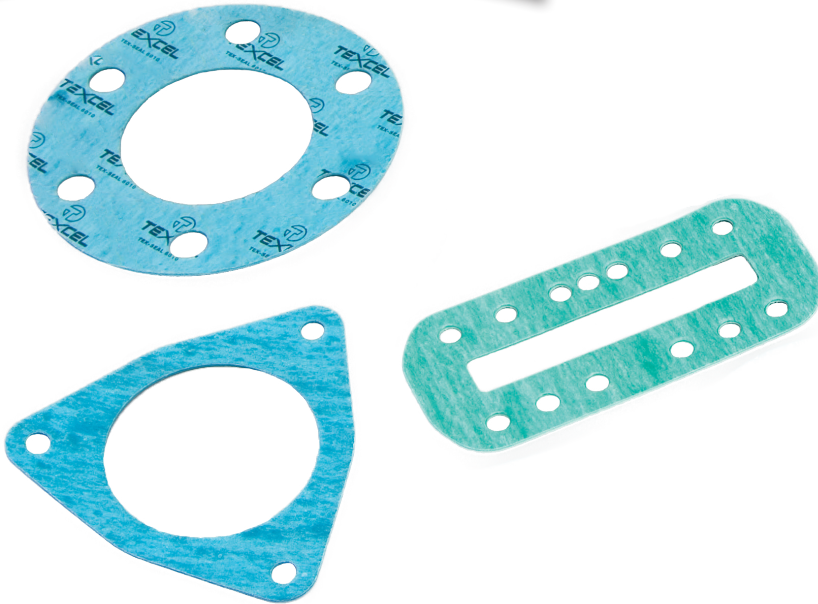

TECHNICAL DATA

| | |
|-------------------------|---|
| Construction | Aramid fiber, inorganic fiber, Nitrile binder |
| Color | Blue or green, with or without black branding |
| Temperature | Continuous operating: 356°F/180°C Maximum Spike: 500°F/260°C |
| Tensile Strength | 1,400+ psi across grain |
| M / Y Value | .08t: 3.5 / 6500 |
| Density | 1.6 g/cm ² |
| ASTM F104 Line Call Out | F712101B5E13K5L101M5 |



| Branding | Dimensions | Thickness | Part Number | Lbs./Sheet |
|-----------|------------|-----------|---------------|------------|
| Unbranded | 60" x 60" | 1/16" | SEAL-G-2-U | 14 |
| | | 1/8" | SEAL-G-4-U | 28 |
| | 60" x 120" | 1/16" | SEAL-G-2-120U | 28 |
| | | 1/8" | SEAL-G-4-120U | 56 |
| Branded | 60" x 60" | 1/64" | SEAL-G-.5 | 4 |
| | | 1/32" | SEAL-G-1 | 7 |
| | | 1/16" | SEAL-G-2 | 14 |
| | | 3/32" | SEAL-G-3 | 21 |
| | | 1/8" | SEAL-G-4 | 28 |
| | 60" x 120" | 1/16" | SEAL-G-2-120 | 28 |
| | | 1/8" | SEAL-G-4-120 | 56 |